



TOP VIEW

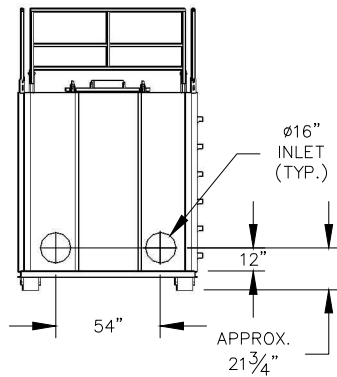

END VIEW

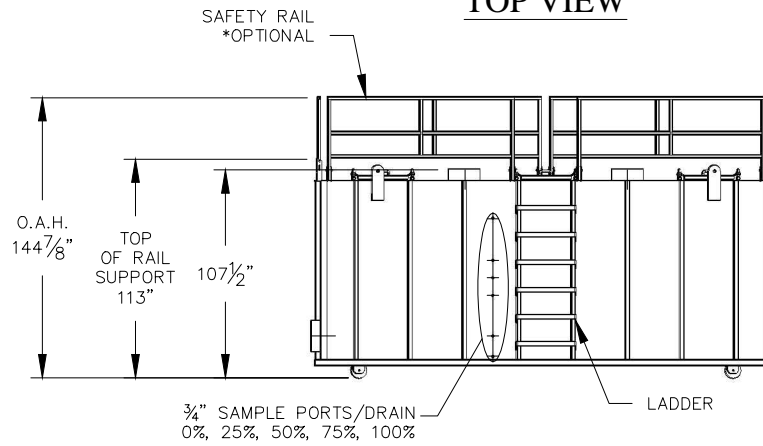

FRONT VIEW

VESSEL STANDARDS

VESEL MATERIALS : SA-36	LIQUID DRAIN ASSEMBLY : 3/4" NPT
LINING : EPOXY	VOLUME OF MEDIA BED : 440 FT ³
EXTERIOR PAINT : EPOXY BASE W/ URETHANE TOP COAT	SHIP WT. EMPTY : 12,000 LBS
INTERNALS : 304 STAINLESS STEEL POR-O-SEPTA	MAX. OPERATING PRESSURE : 1 PSI
VESEL ACCESS : 42" x 24" ACCESS HATCH (3 PLCS.)	MAX. OPERATING TEMPERATURE. : 180°

2	REVISED FOR 42" x 24" VESSEL ACCESS	JB	12/22/14
1	REVISED FOR TIGG FABRICATION STANDARDS	JB	1/21/13
NO.	REVISION	BY	DATE

PROJECT

NB-12

PROJ. NO. SALES
P.O. NO.

THIS DRAWING AND DESIGN ARE THE PROPERTY OF TIGG CORP. AND SHALL NOT BE REPRODUCED IN WHOLE OR IN PART, NOR EMPLOYED FOR ANY PURPOSE OTHER THAN SPECIFICALLY PERMITTED IN WRITING BY TIGG CORP. THIS DRAWING LOANED SUBJECT TO RETURN ON DEMAND.

DRAWN BY JB
DESIGN BY BB
CHKD. BY BB
DATE 10/13/08
SCALE NTS



NB-12
PLAN & ELEVATION

DWG. NO. NB-12-1001 REV. 2